

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number  
**WO 2004/018106 A1**

- (51) International Patent Classification<sup>7</sup>: **B02C 21/02**
- (21) International Application Number:  
PCT/GB2003/002855
- (22) International Filing Date: 3 July 2003 (03.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0219563.4 22 August 2002 (22.08.2002) GB
- (71) Applicant (for all designated States except US): **EXTEC SCREENS AND CRUSHERS LIMITED** [GB/GB];  
Hearthcote Road, Swadlincote, Derbyshire DE11 9DU (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DOUGLAS, Paul** [GB/GB];  
Hearthcote Road, Swadlincote, Derbyshire DE11 9DU (GB). **BRATTON, Terence** [GB/GB];  
Hearthcote Road, Swadlincote, Derbyshire DE11 9DU (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MOBILE 3-PART CRUSHER ASSEMBLY**

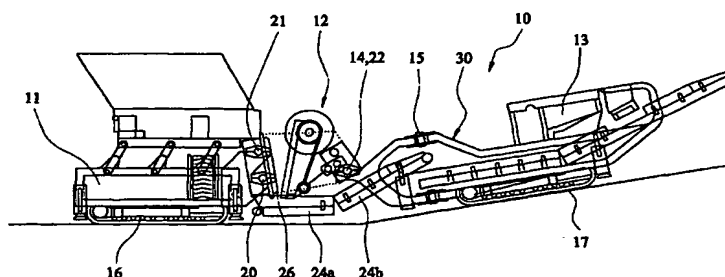

(57) Abstract: A mobile 3-part crusher assembly (10) having a feeder section (11), a crusher section (12) and a discharge section (13) which are detachably connectable together to work in a crushing mode, and can be separated from each other for individual handling and transport in a transport mode of the assembly. The crusher section (12) is pivotally connected to the discharge section (13), and the feeder section (11) and the discharge section (13) are manoeuvrable independently of each other, so as to facilitate overall manoeuvrability of the assembly on site. The rigid coupling between the feeder section (11) and the crusher section (12) is provided by vertically spaced receiving-socket type couplings (20) on section (11) and complimentary mountings (21) on section (12) which are clamped to couplings (20). The detachable coupling of section (13) to section (12) (which provides separate horizontal and vertical pivot axes - on level ground), is formed by interfit between horizontal mounting (22) of section (12) and pivot support (14) of section (13). There is also a coupling between a forward pivot (23) on a forward conveyor portion (24) of section (13) on a pivot support (not shown in detail) provided either on section (11), or (12). The forward conveyor portion (24) of the discharge section (13) has two articulated sections (24a) and (24b), and with the foremost section (24a) being capable of underlying the discharge outlet (26) for crushed material from the jaws (18), (19) of the crusher section. The discharge section (13) preferably is provided with one or more screening portions, to separate the screened material into different size ranges, and one or more discharge conveyors may be provided, which can be adjusted to vary the position of discharge of crushed and screened material from the discharge section (13).

WO 2004/018106 A1